


1. 产品规格 (Product Specification)

产品编码 (Part Number)	K7A6B203190433
电气参数(Parameter)	
频率范围 (Frequency)	433MHz
输入阻抗(Impedance)	50Ω
驻波比(VSWR)	≤2.0
增益(Gain)	-2.0dBi
最大效率 (Max. Efficiency)	≥35%
极化方式 (Polarization)	Linear polarization/Vertical
辐射方向图 (Radiation pattern)	Omni-directional
接口类型 (Connector)	SMA 公头母针 (塑胶壳)
机械参数(Mechanical Parameter)	
总长(Length)	195±3.0mm
盐雾测试(Salt Spray Test)	48H
环境参数(Environment Parameter)	
工作温度(Operation Temperature)	-30℃~65℃
储藏温度(Storage Temperature)	-30℃~75℃

2. 电气性能测试报告(Radiation Report)

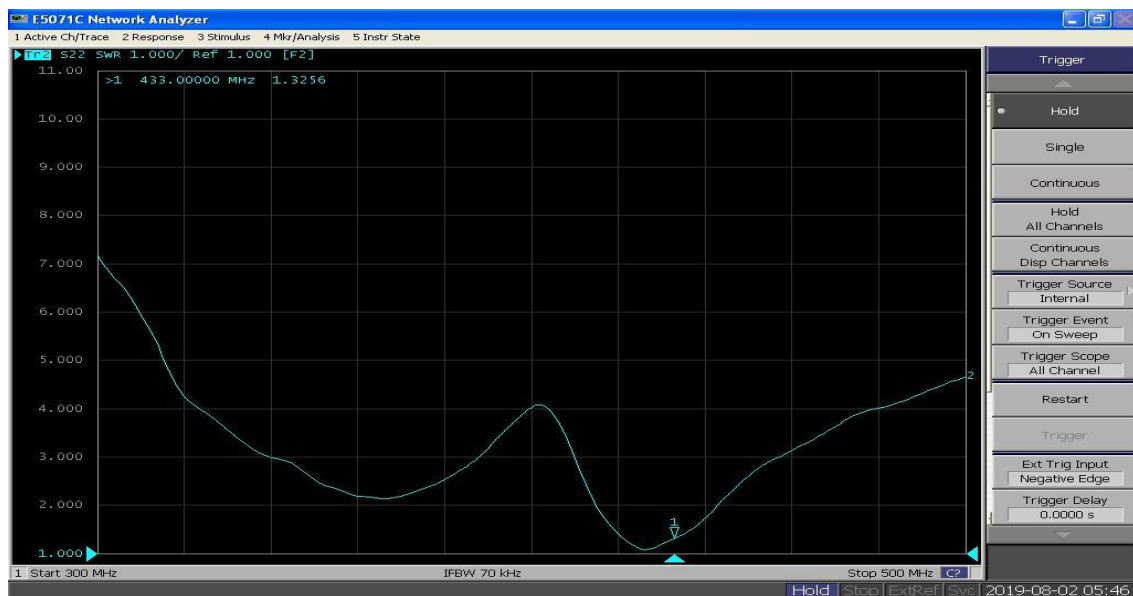


效率及增益(Efficiency And Gain)

ANTO		
频段	效率	增益
423	30%	-2.0
425	31%	-2.0
427	32%	-2.0
429	33%	-1.9
431	34%	-1.8
433	34%	-1.9
435	34%	-1.8
437	34%	-1.7
439	35%	-1.6
441	36%	-1.5
443	38%	-1.3



方向图

433Mz

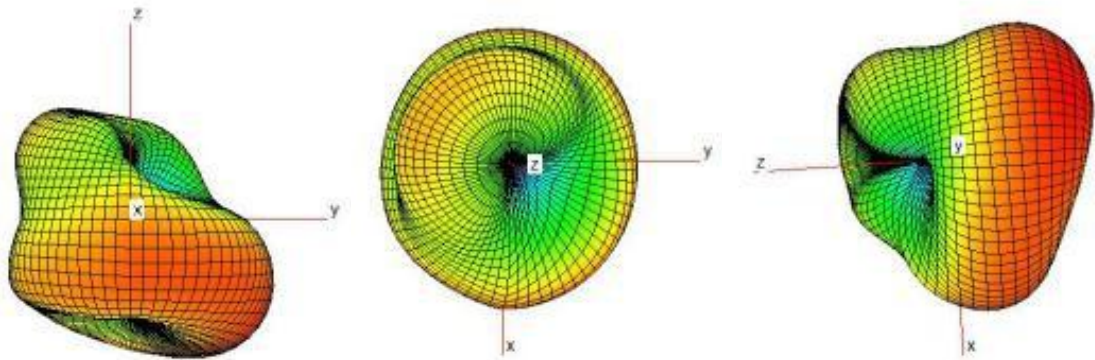

3. 工程图纸 (Mechanical Drawing)




由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

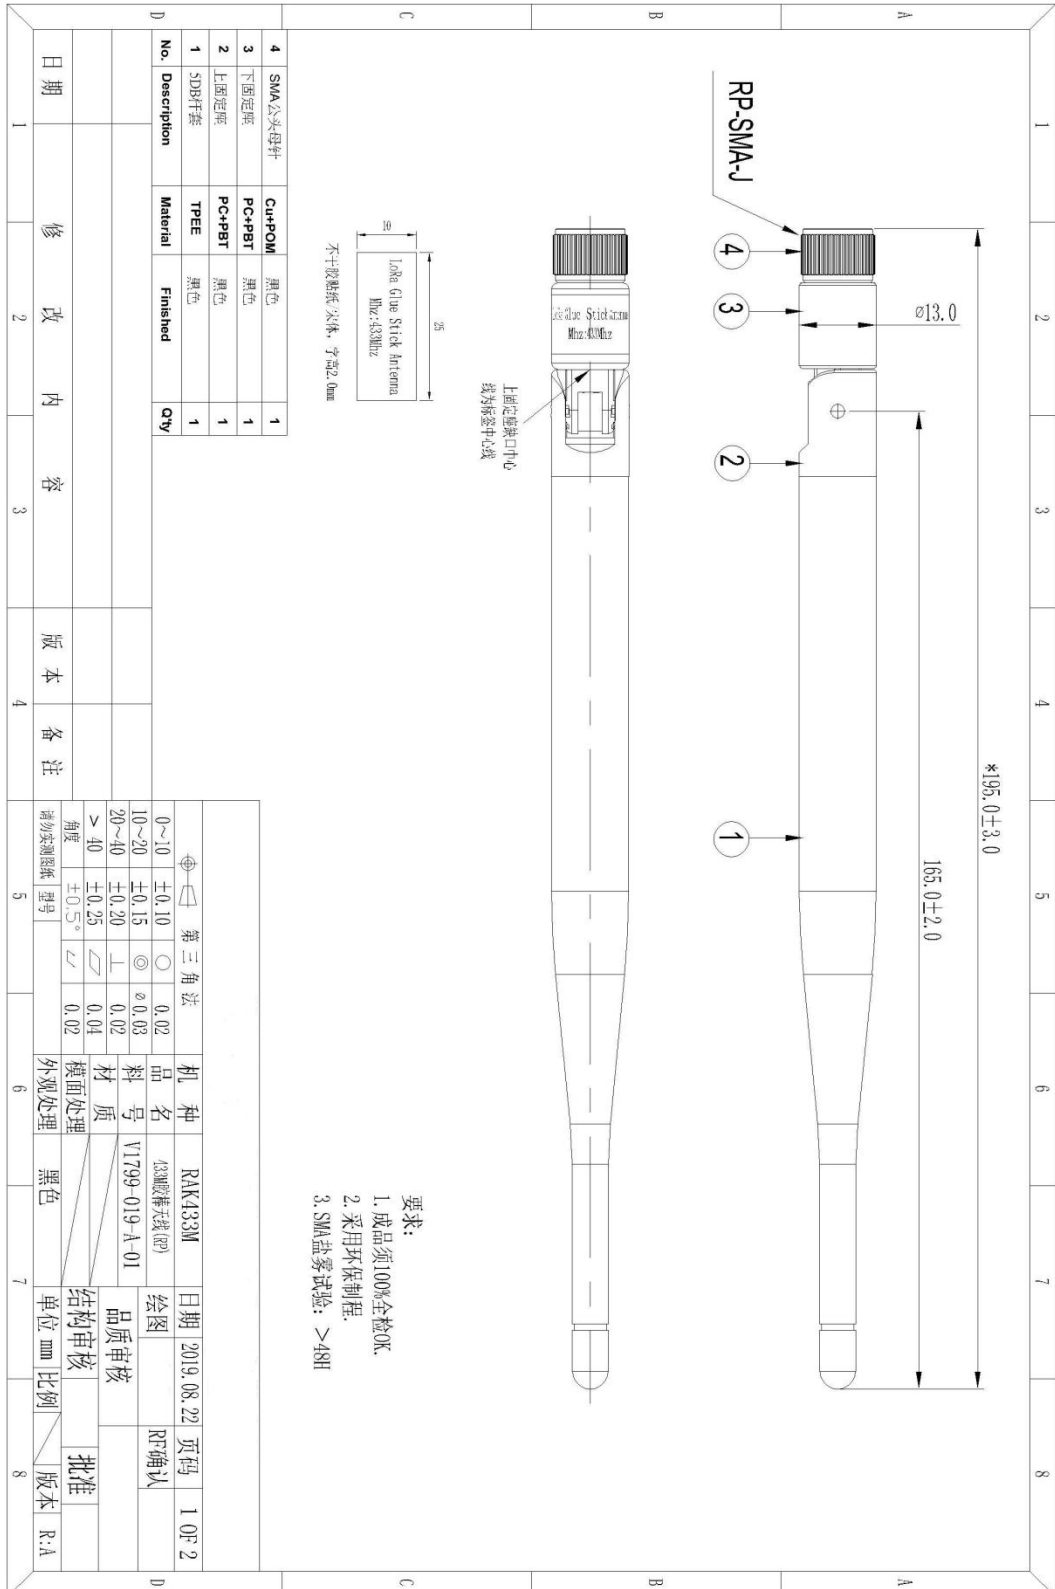

要求:
1. 成品须100%全检OK.
2. 采用环保制程.
3. SMA盐雾试验: >48H